


Korel® K40 Series

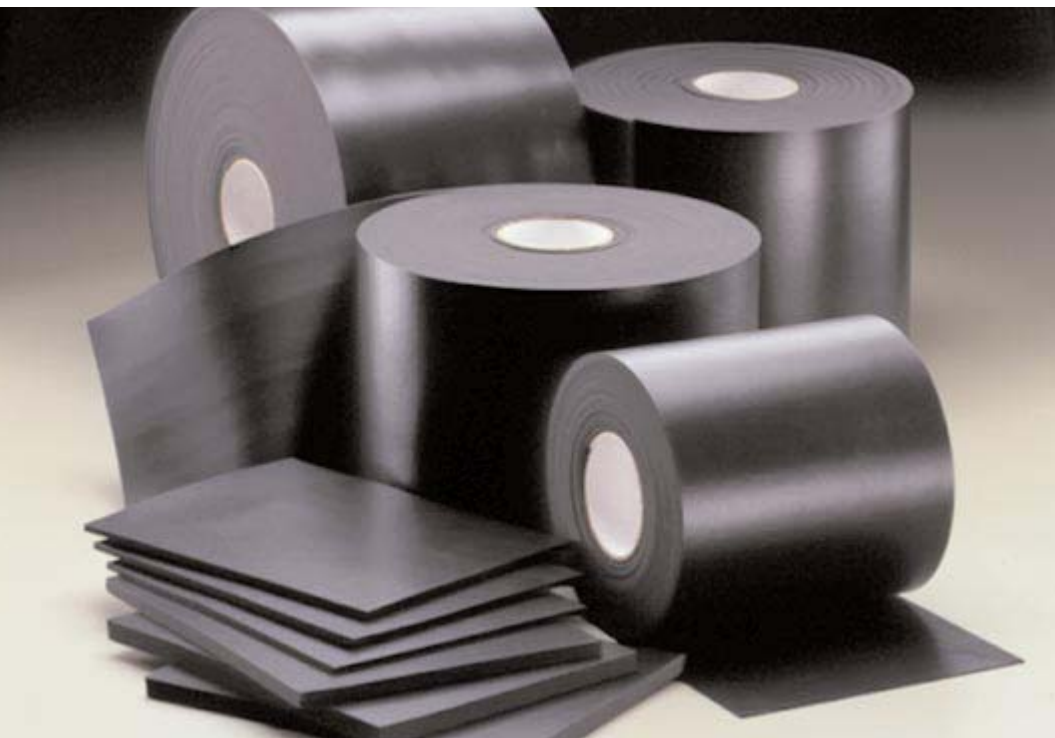

Korel® K40 Series Micro-cellular Polyurethane Foams

Korel® K40 series is a medium deflection urethane foam with minimal compression set and low out-gassing that exceeds fogging requirements.

Gasketing – Korel® has excellent resistance to compression set and high resiliency that ensures the seal will not break down over extended use, making it a preferred choice for gasketing applications.

Control of Unwanted Energy – The Korel® line of cushioning foam is ideal for controlling unwanted energy. These special formulations protect sensitive components by damping shock, dissipating motion, isolating vibration, and absorbing impact energy.

Non-standard products (optional – liners, adhesive, or color) can be produced by special order. Minimum and extended lead times may apply.

Other Korel® Foams

Saint-Gobain has developed a full line of Korel micro-cellular foams. By varying the modulus and density, we have created a broad product group that is categorized by degree of deflection force.

Engineered for High Performance Gasketing Applications

Features/Benefits

- Excellent compression set-resistance
- Highly resilient (will not collapse)
- Dissipates stresses
- Resistant to moisture and most chemicals
- Conformable and flexible even in extreme environmental conditions
- Easy to achieve intricate die-cut parts
- Aggressive acrylic adhesive (optional) facilitates assembly
- Available cast on to polyester film for stability and low deformation

Typical Applications

- Cellular Telephones
- Electrical Enclosures
- Electronic Gasketing
- Vibration Damping
- Cushioning
- Acoustical Control
- Bumpers
- Instrument Panels
- Spacers

Korel® K40 Series Micro-Cellular Polyurethane Foams

Property	Test Method	Korel® K40
Physical		
Density, lb/ft ³ (kg/m ³)	ASTM D3574	20 (320)
Thickness, inches (mm)		.062 (1.5)
		.094 (2.4)
		.125 (3.2)
		.188 (4.8)
		.250 (6.4)
Standard Color		Black
Compression Set, %	ASTM D3574 Test D	
@ 73°F (23°C)		<2
@158°F (70°C)		<7
Compression Force Deflection, psi (kPa)	ASTM D3574 TEST C	
12.7 mm/min @ 25% Deflection		10 (69)
Force to Compress @ 25%, psi (kPa)	ASTM D1667	18 (124)
Hardness, Durometer	Shore "O"	53
Tear Strength, pli (kN/m)	ASTM D624 Die C	26 (4.6)
Tensile Elongation, %	ASTM D3574	380
Tensile Strength, psi (kPa)	ASTM D3574	198 (1363)
Modulus psi (kPa)	ASTM D3574	85 (587)
Thermal		
Temperature Resistance		
Recommended Constant Use, max		158°F (70°C)
Recommended Intermittent Use, max		250°F (121°C)
Thermal Conductivity, BTU-in/hr-sq ft°F (W/m-C)	ASTM E1530	0.6 (0.086)
Environmental		
Fogging	SAE-J 1756, 3 hrs. @ 212°F (100°C)	Pass
Outgassing	ASTM E595, 24 hr. @ 257	
TML %		1.18
CVCM %		0.25
WVR %		-
Water Absorption, % wt. gain	AMS 3568-95	10
Electrical		
Surface Resistivity, ohm/sq	ASTM D257	1.5 x 10 ¹³
Volume Resistivity, ohm.cm	ASTM D257	3.2 x 10 ¹⁴
Dielectric Strength, volts/mil	ASTM D149	47

Please Note: Because Saint-Gobain Performance Plastics cannot anticipate or control every potential application, we strongly recommend testing of this product under actual application conditions prior to commercial use.

Korel® is a registered trademark.

Saint-Gobain Performance Plastics

One Sealants Park
Granville, NY 12832
Tel: 800-724-0883
Tel: 518-642-2200
Fax: 518-642-1792

Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse, or inability to use this product(s). SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform its own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.